


## TABLE OF CONTENTS


RX\_TX.....Page 2  
 DB25 connector  
 RS422  
 RS232

CPLD..... Page 3  
 40 Pin Input Connector  
 40 Pin Output Connector  
 40 MHz OSC

POWER.....Page 4  
 Power Supply Conditioning  
 DC/DC Converter

Angela Baran		
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879		
Title Conditioning Interface Module / MAIN		
Size A	Document Number y04001_REV2	Rev 1
Date:	Tuesday, February 17, 2004	Sheet 1 of 4

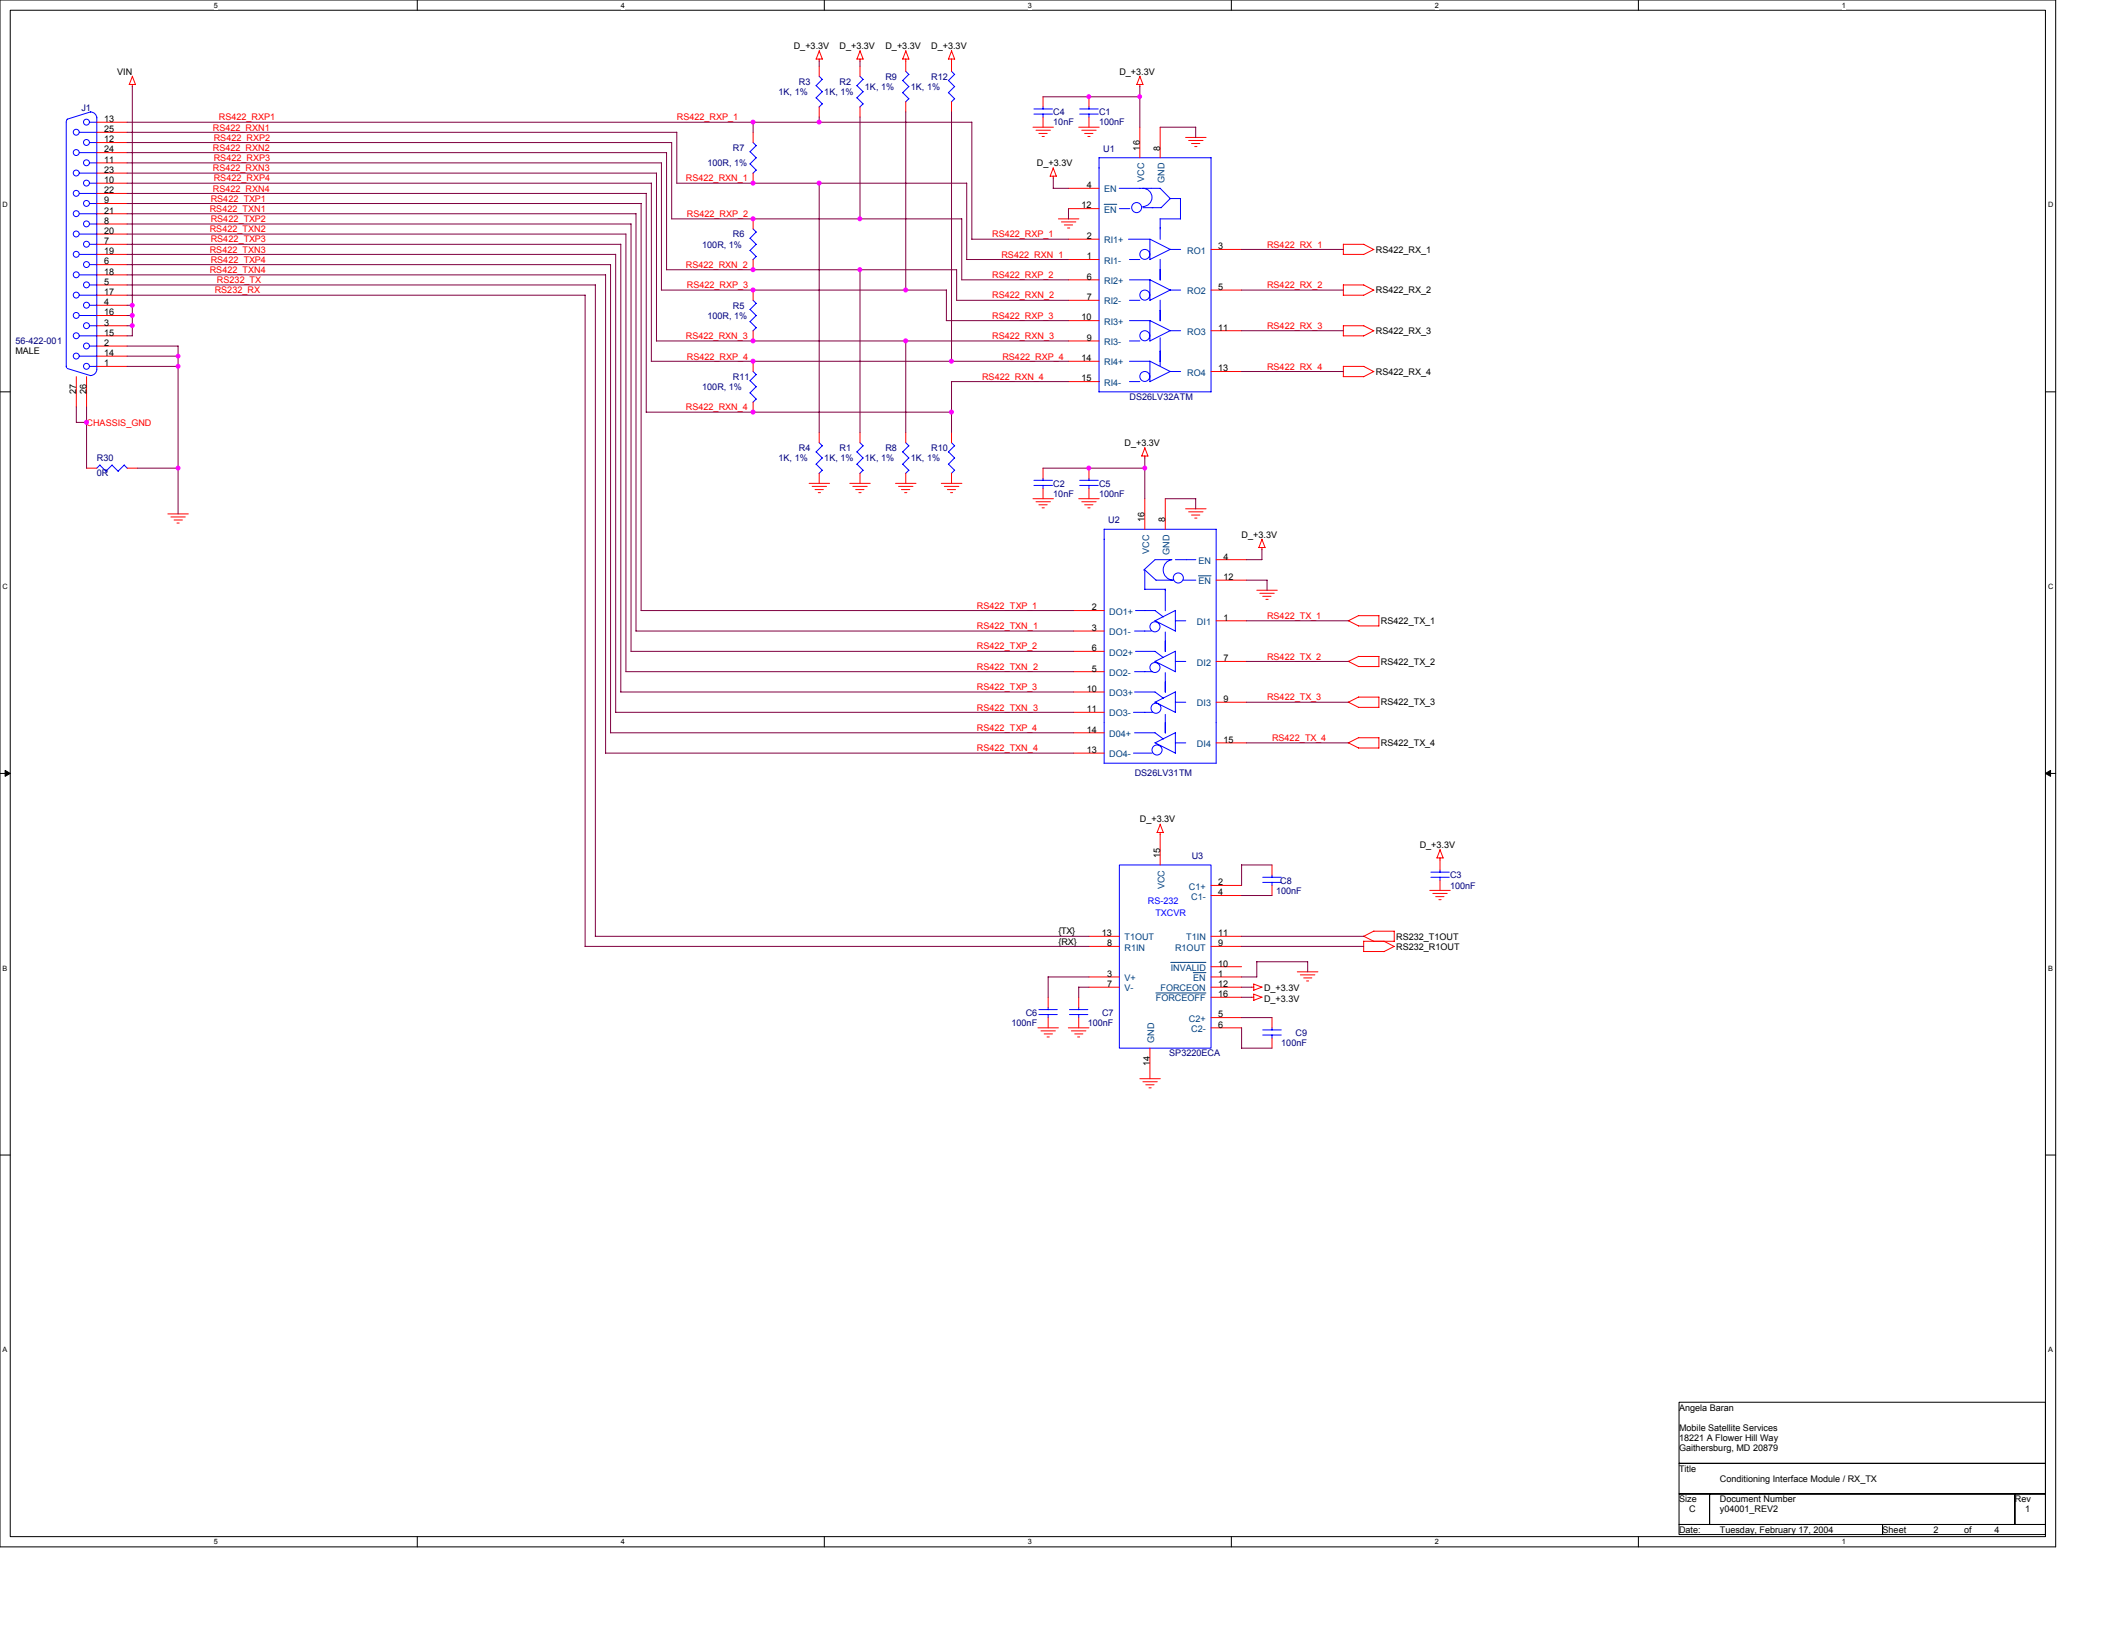



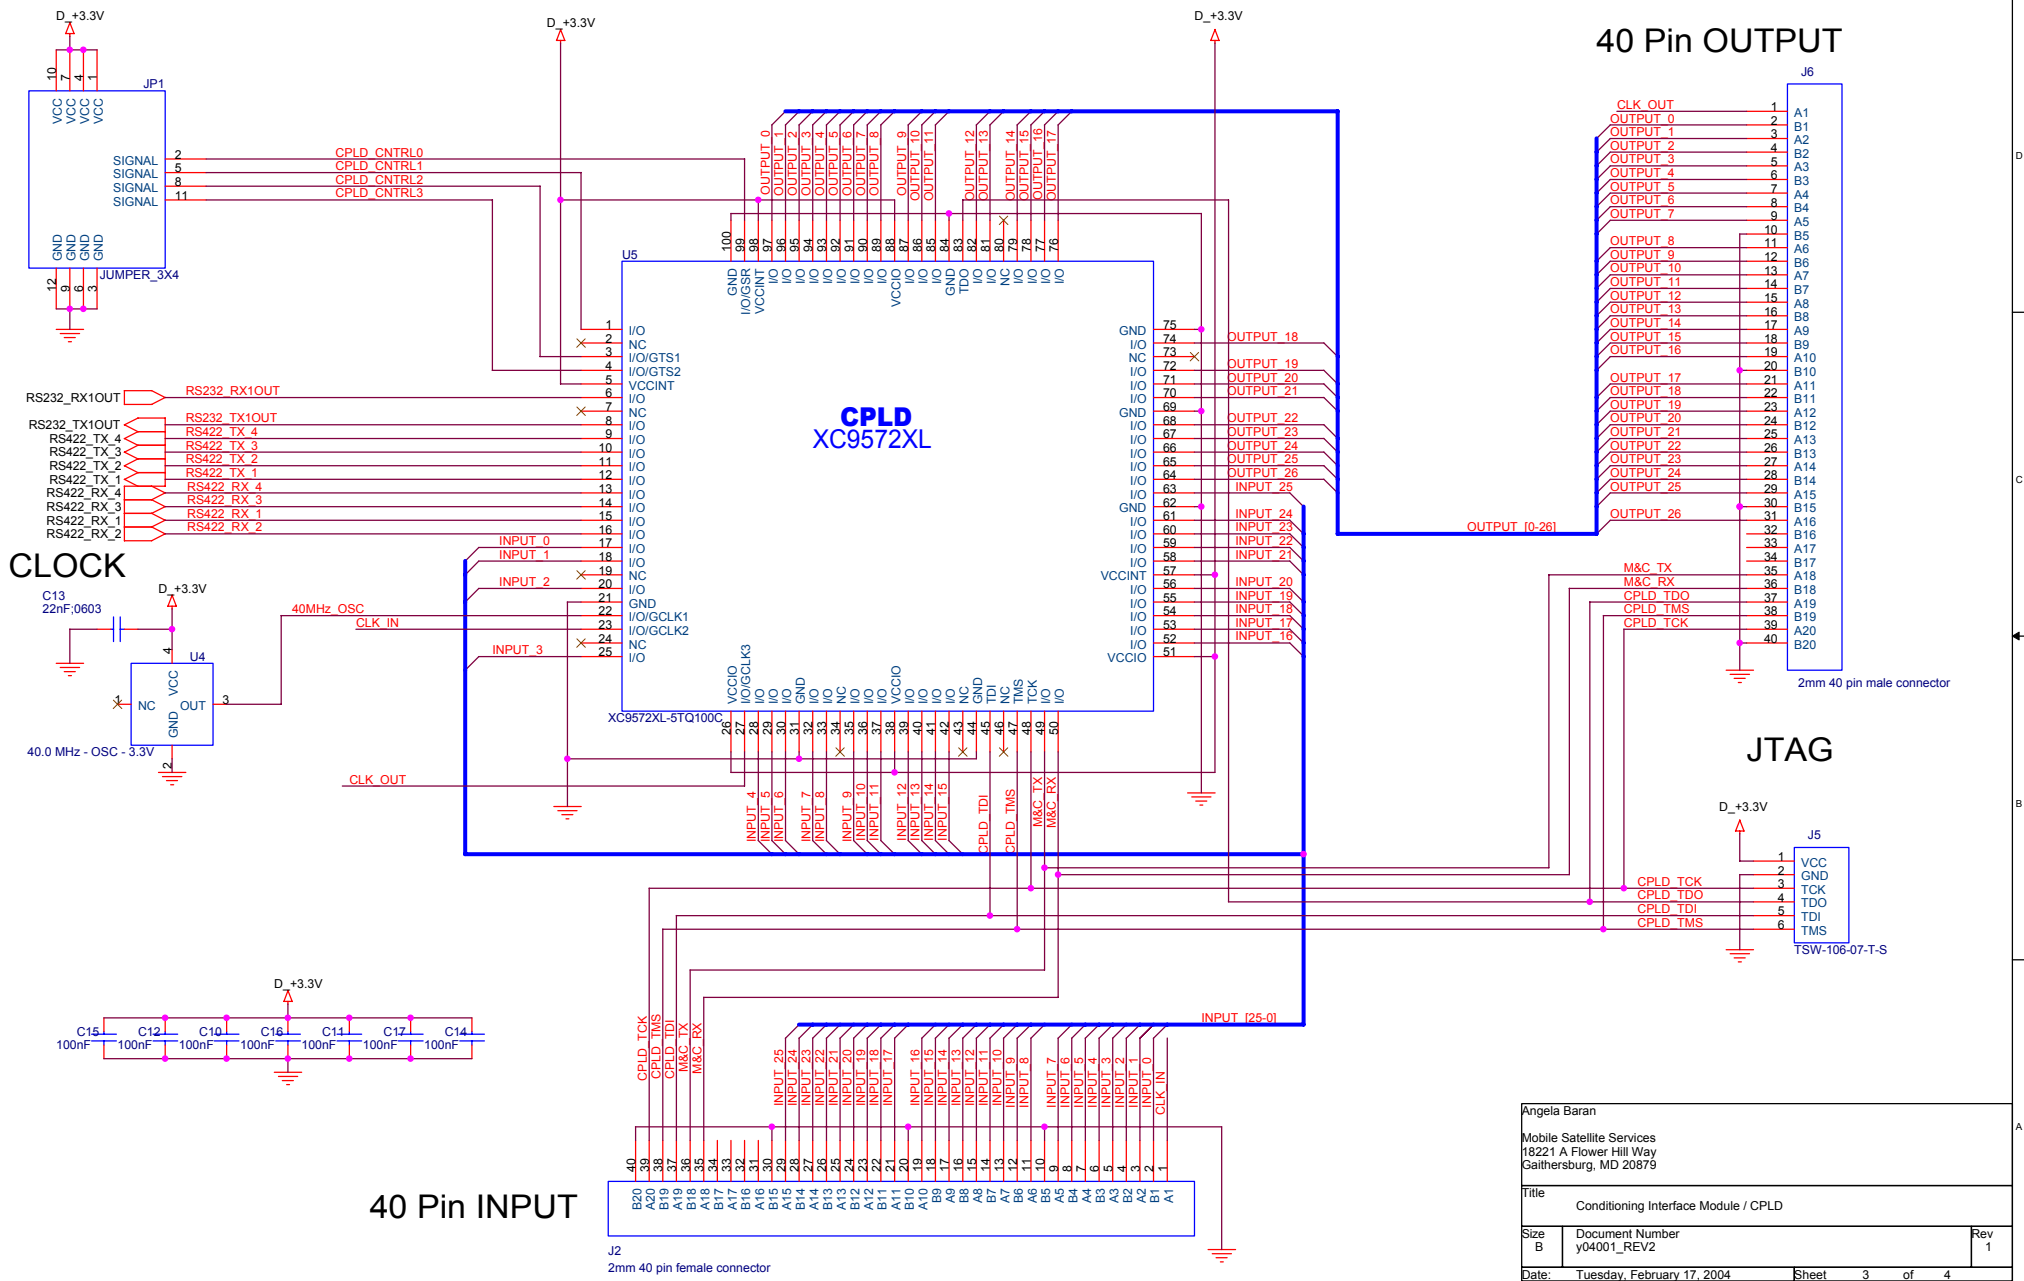


40 Pin INPUT

40 Pin OUTPUT

Angela Baran		
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879		
Title Conditioning Interface Module / CPLD		
Size B	Document Number y04001_REV2	Rev 1
Date: Tuesday, February 17, 2004	Sheet 3	of 4

Input Voltage = 5.5V to 24V Operational  
 Input Voltage = up to 60V (Transient)

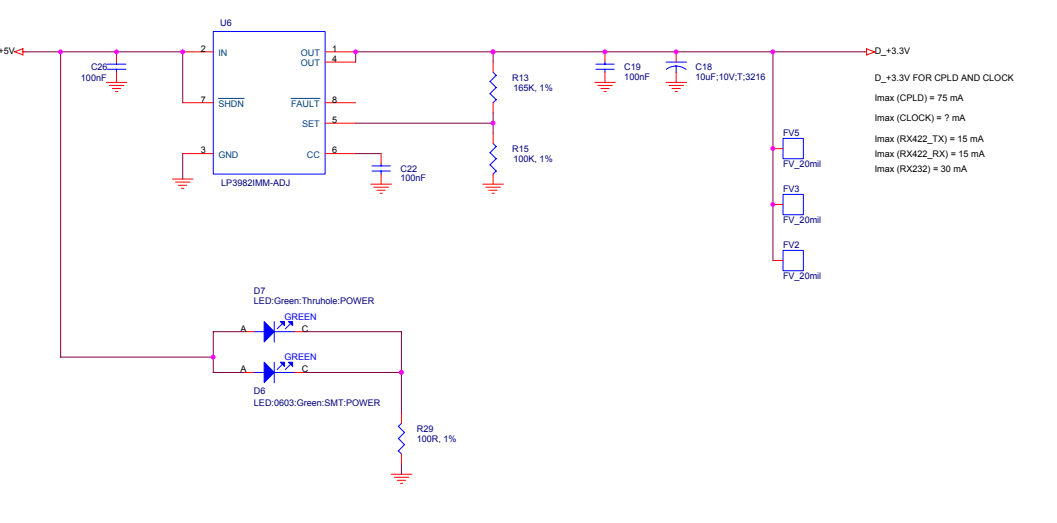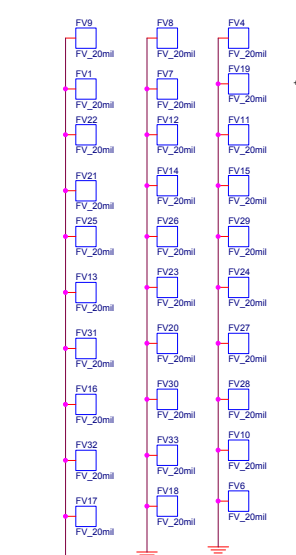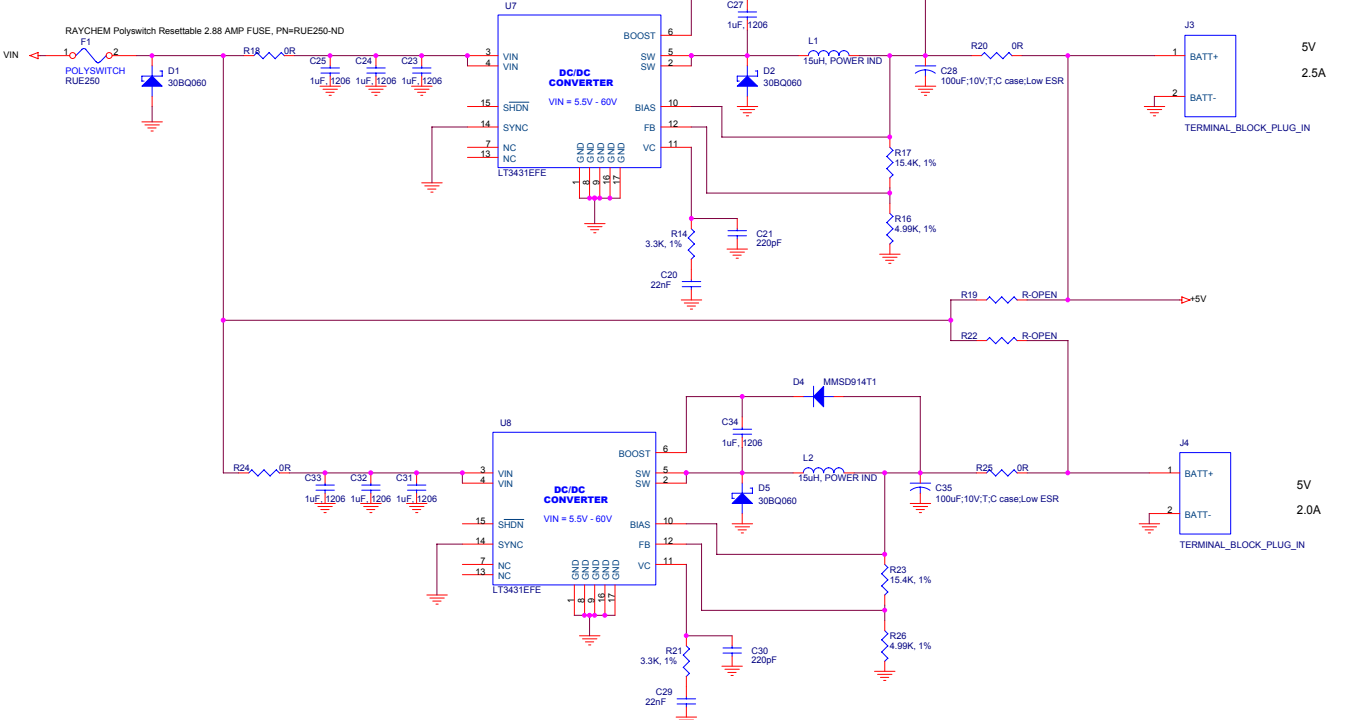

Angela Baran	
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879	
Title Conditioning Interface Module / POWER	
Size C	Document Number y04001_REV2
Date Tuesday, February 17, 2004	Sheet 4 of 4
	Rev 1