



## TABLE OF CONTENTS

RX_TX.....	Page 2
DB25 connector	
RS422	
RS232	
CPLD.....	Page 3
40 Pin Input Connector	
40 Pin Output Connector	
40 MHz OSC	
POWER.....	Page 4
Power Supply Conditioning	
DC/DC Converter	



Angela Baran		
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879		
Title Conditioning Interface Module / MAIN		
Size A	Document Number y04001_REV2	Rev 1
Date:	Tuesday, February 17, 2004	Sheet 1 of 4

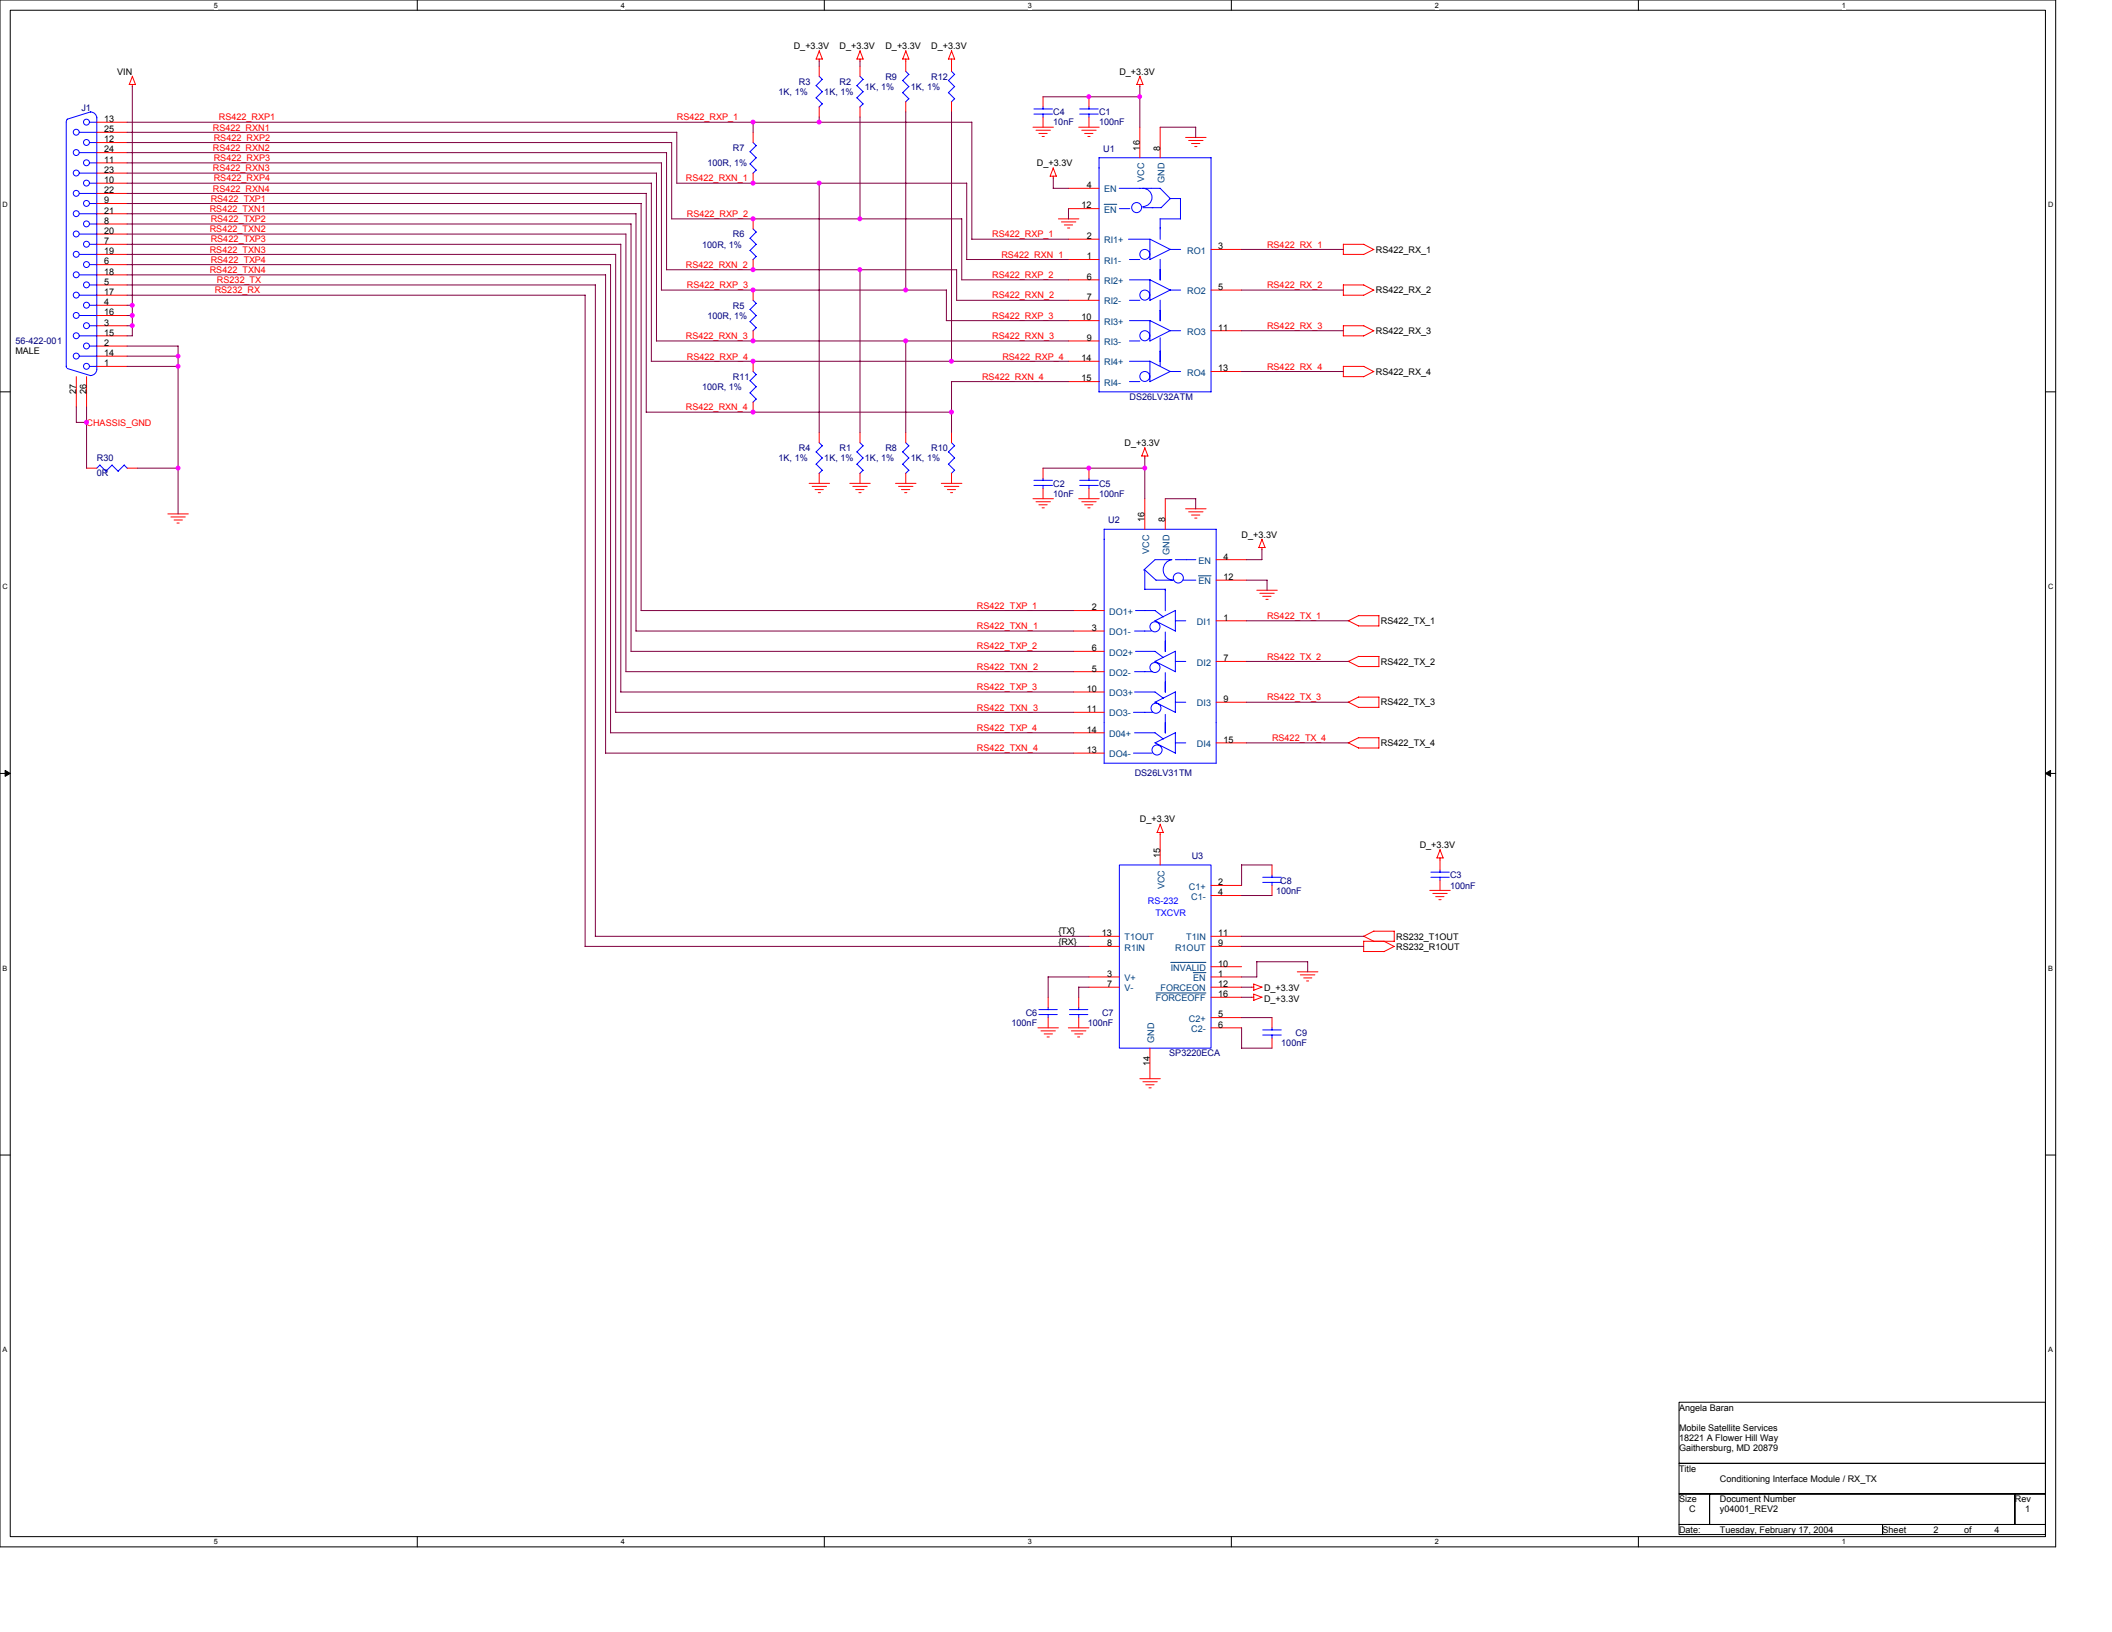

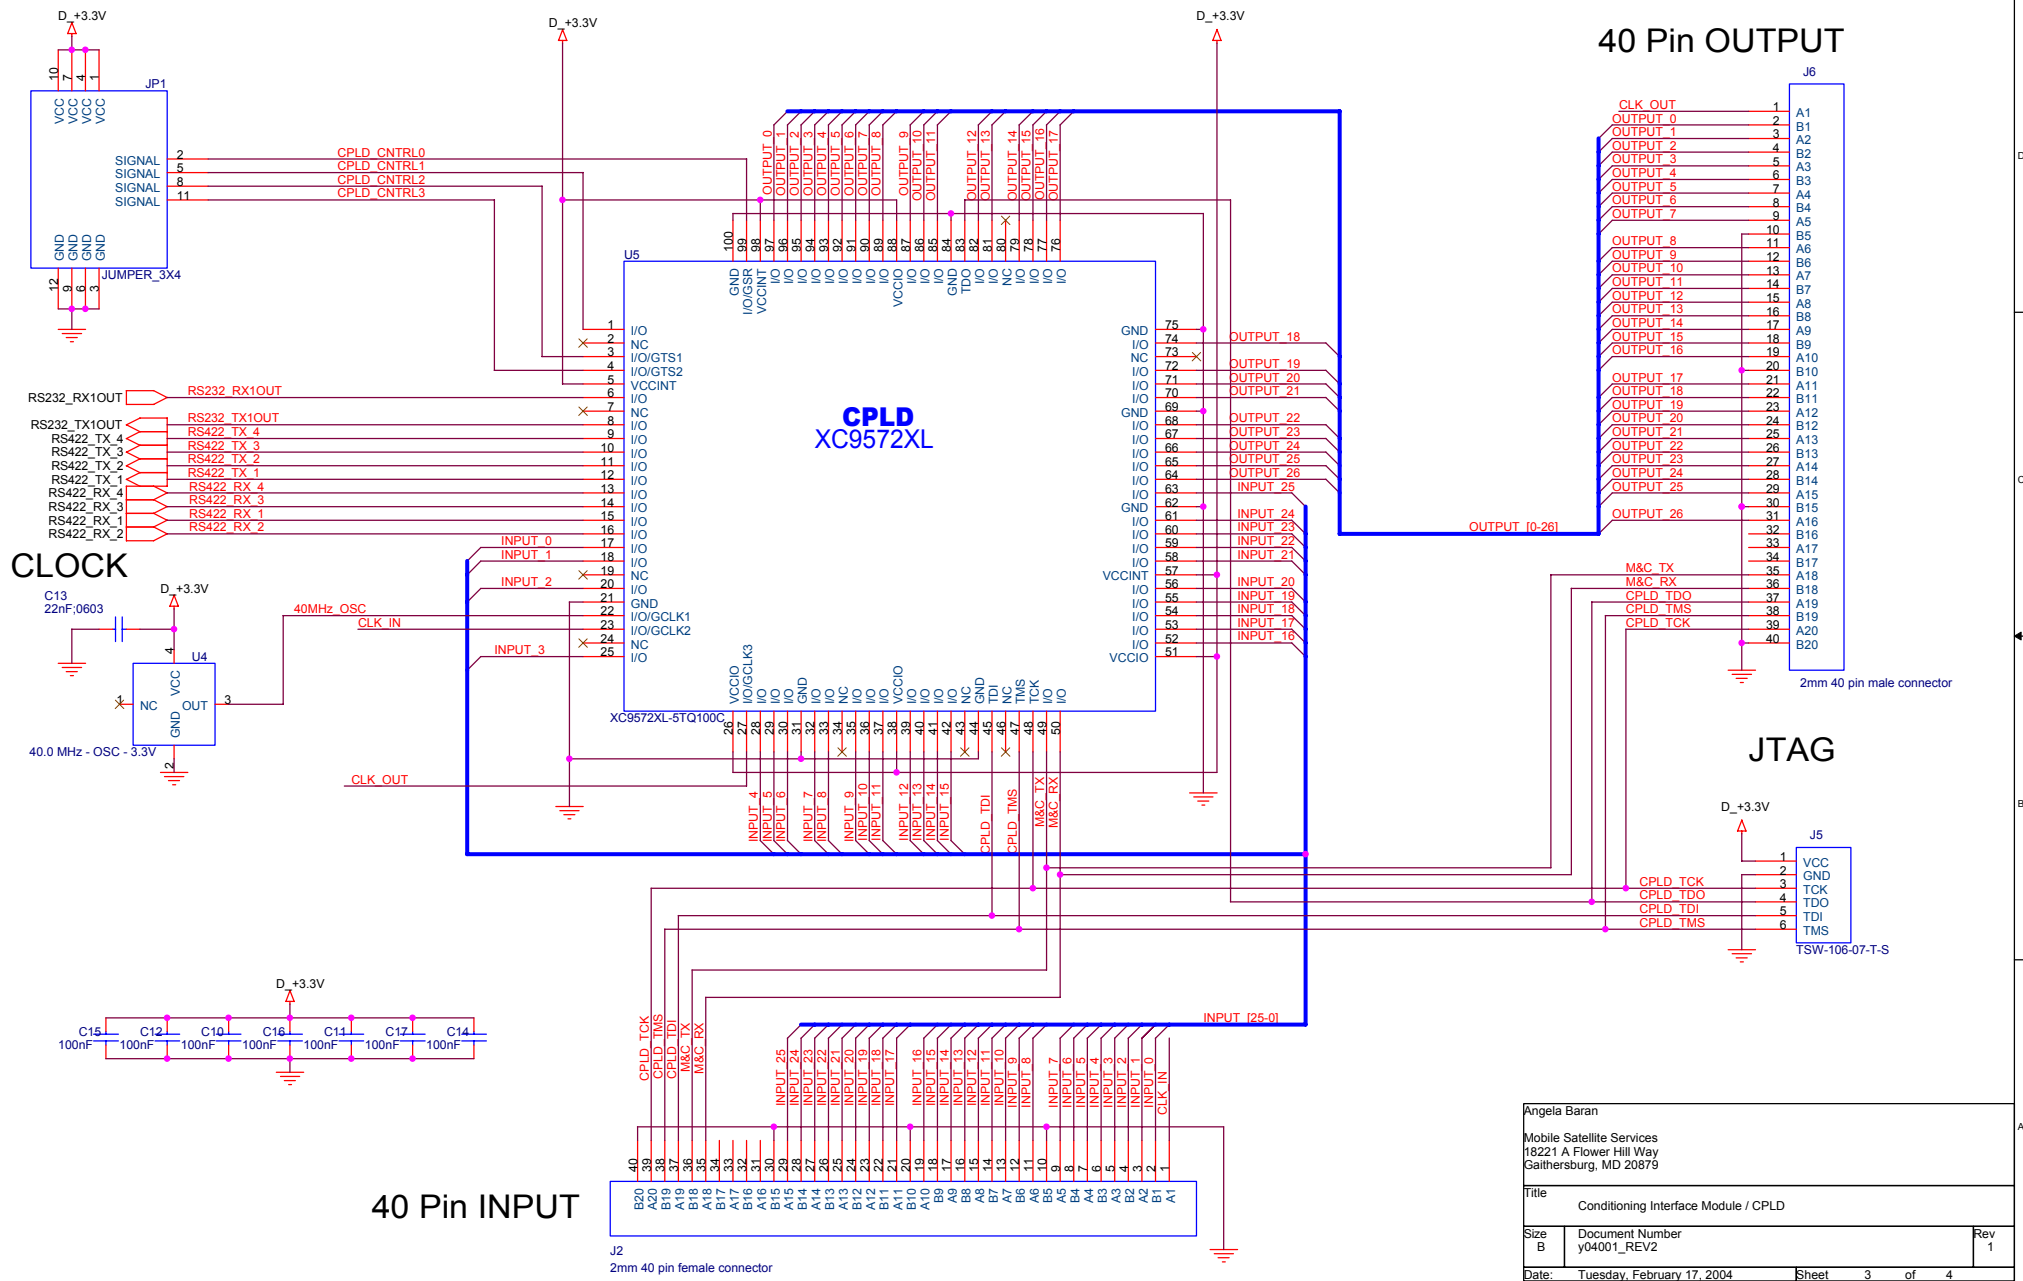

Angela Baran		
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879		
Title Conditioning Interface Module / CPLD		
Size B	Document Number y04001_REV2	Rev 1
Date: Tuesday, February 17, 2004	Sheet 3	of 4

Input Voltage = 5.5V to 24V Operational  
 Input Voltage = up to 60V (Transient)

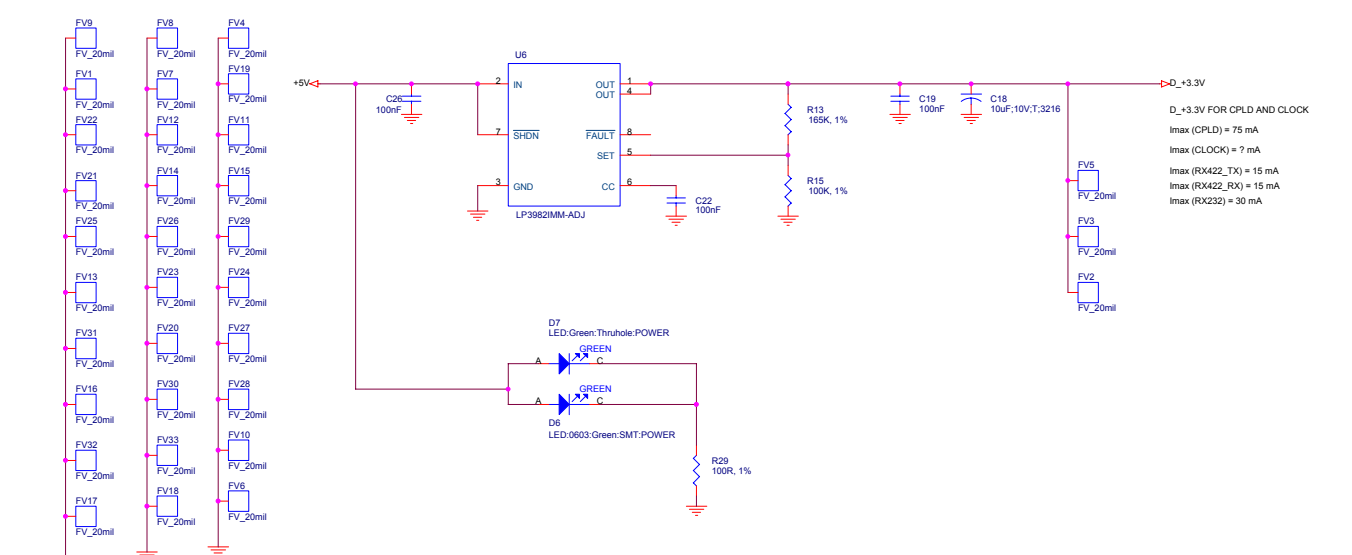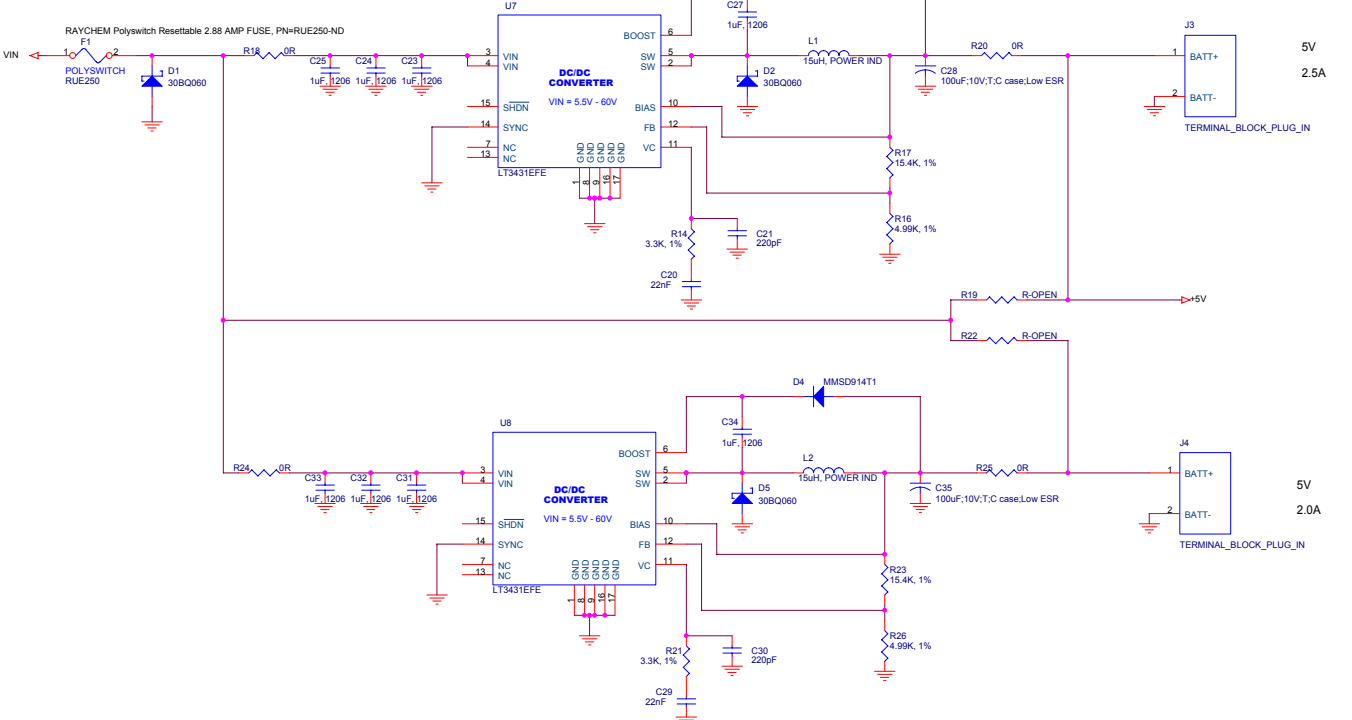

FV9 FV8 FV4  
 FV1 FV7 FV19  
 FV22 FV12 FV11  
 FV21 FV14 FV15  
 FV25 FV26 FV29  
 FV13 FV23 FV24  
 FV31 FV20 FV27  
 FV16 FV30 FV28  
 FV32 FV33 FV10  
 FV17 FV18 FV6

Angela Baran	
Mobile Satellite Services 18221 A Flower Hill Way Gaithersburg, MD 20879	
Title Conditioning Interface Module / POWER	
Size C	Document Number y04001_REV2
Date Tuesday, February 17, 2004	Rev 1
Sheet 4 of 4	