

## COM-4102 2.4 GHz TRANSCEIVER 25 dBm Power / 3.5 dB Noise Figure

### Key Features

- Transmit / Receive module for half-duplex communications.
- Output power  $P_{sat} = 25$  dBm,  $P_{1dB} = TBD$
- Noise figure:  $NF = 3.5$  dB
- Receive frequency range: 2400-2484 MHz
- Transmit frequency range: 2400-2484 MHz
- 25 ns Tx/Rx switch
- Single 5V supply
- Connectorized 3"x 3" module for ease of prototyping. SMA connectors.




For the latest data sheet, please refer to the **ComBlock** web site: [www.comblock.com/download/com4102.pdf](http://www.comblock.com/download/com4102.pdf). These specifications are subject to change without notice.

For an up-to-date list of **ComBlock** modules, please refer to [www.comblock.com/product\\_list.htm](http://www.comblock.com/product_list.htm).

### Electrical Interface

### Block Diagram

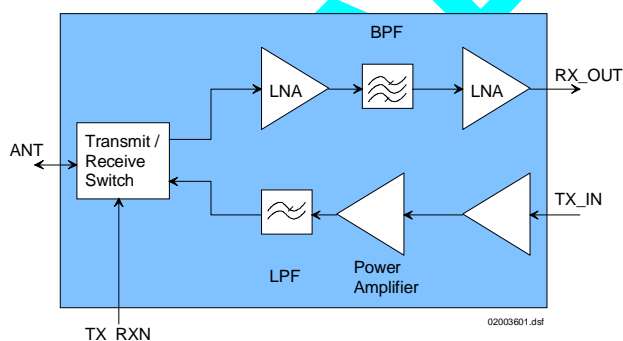

### Inputs / Outputs

Module Interface	Definition
TX_IN	RF transmitter input signal. SMA connector.
ANT	Antenna port. SMA connector.
RX_OUT	RF receiver output signal. SMA connector.
TX_RXN	Switch control: 0 for receive, 1 for transmit. LVTTTL.
<b>Power Interface</b>	4.75 – 5.25VDC. Terminal block. Power consumption is 550mA typ while transmitting, 200 mA while receiving.

### Absolute Maximum Ratings

TX_IN input	+10 dBm
ANT input	+15 dBm
DC voltage	+16V / -400VDC


# Performances

## Receiver

Noise Figure: 3.5 dB typ.

Gain: 19 dB

Gain flatness: +/- 1 dB over range [2.4-2.5GHz]

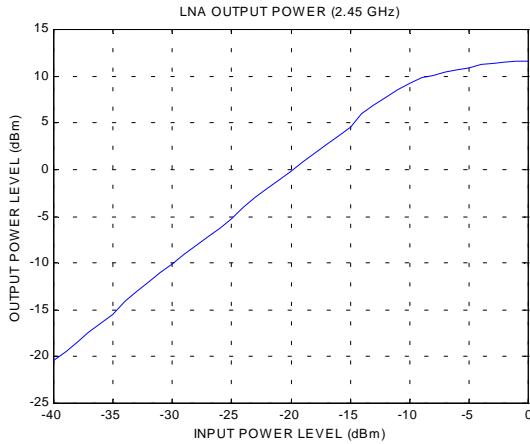


## Transmitter

Output power at antenna port (saturation):


25 dBm typ.

Output compression: see measurement below

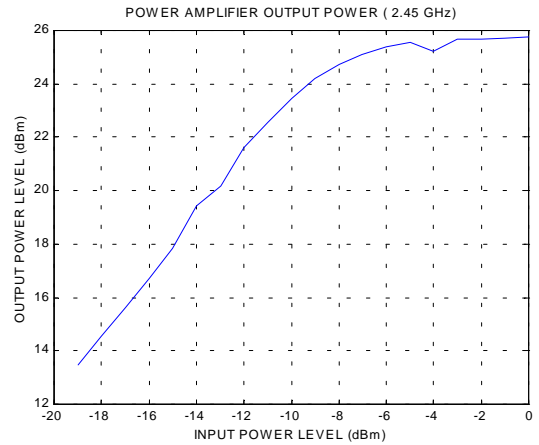


Gain flatness: +/- 0.3 dB over range [2.4-2.5GHz]

## Receiver gain

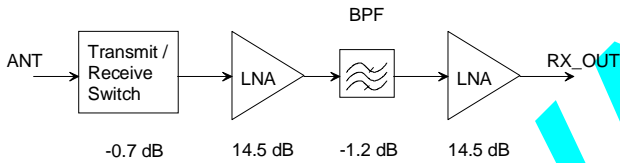


## Transmitter gain & level

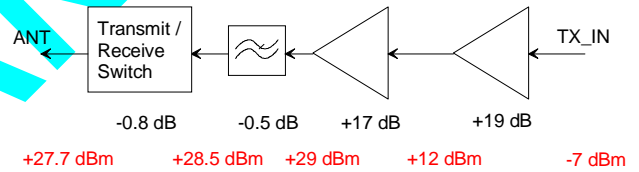

## Receiver bandpass filter

A ceramic filter is placed between the two LNA amplifiers. The frequency response is plotted below:

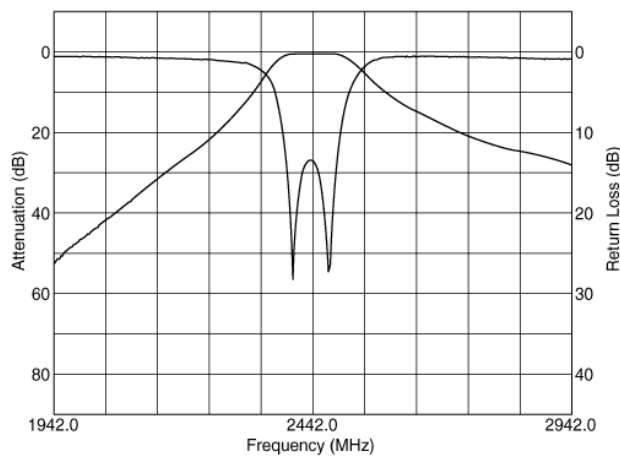


The gain & level diagram above assumes a 2 dB output backoff at the power amplifier as a tradeoff between linear operations (to keep the modulation sidelobes reasonably low) and maximum output power.

## Tx/Rx Switch

Switch time: 25 ns.


## Harmonics rejection

An LC filter is placed after the power amplifier to reject the second and third harmonics. The frequency response is as follows:

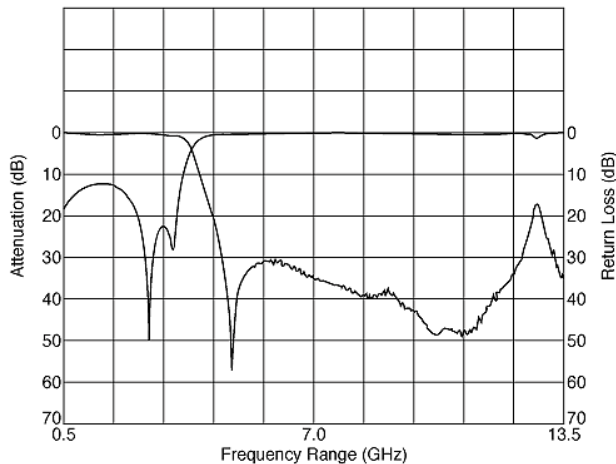

## Output Connector Jx

12-pin (2 rows x 6) 2mm male connector.



## I/O Compatibility List


(not an exhaustive list)

Input	Output
COM-4001 Dual-band 915 MHz / 2.4 GHz modulator	COM-3001 Dual-band 915 MHz / 2.4 GHz receiver

Maximum 2<sup>nd</sup> harmonics at Pout = 25 dBm: TBD dBm.

Maximum 3<sup>rd</sup> harmonics at Pout = 25 dBm: TBD dBm.

## Mechanical Interface

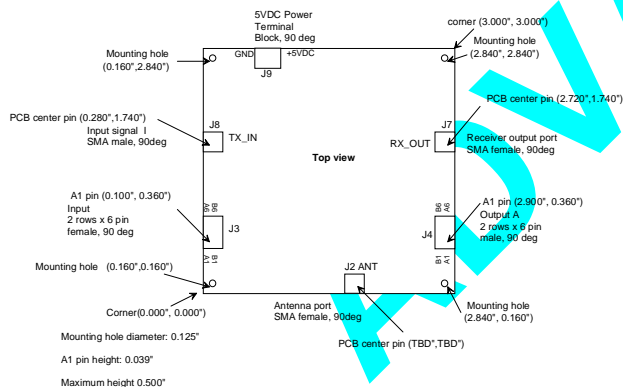

## ComBlock Ordering Information

COM-4102 2.4 GHz TRANSCEIVER,  
25 dBm power, 3.5 dB noise figure

MSS • 18221 Flower Hill Way #A •  
Gaithersburg, Maryland 20879 • U.S.A.  
Telephone: (240) 631-1111  
Facsimile: (240) 631-1676  
E-mail: sales@comblock.com

## Pinout

### Input Connector Jx

12-pin (2 rows x 6) 2mm female connector.

